



Operating elements 1

## Three-arm handwheel

### Technopolymer

#### MATERIAL

Glass-fibre reinforced polypropylene based (PP) technopolymer, black colour, matte finish.

#### BOSS CAP

- ECB.I: polyester based technopolymer (PBT) in Elecolors colours, glossy finish, press-fit assembly. Supplied. Available also as accessory sold separately (see table).

#### STANDARD EXECUTION

Black-oxide steel boss, H7 reamed hole. Revolving handle I.631+x (see page -) in technopolymer, not removable.

#### SPECIAL EXECUTIONS ON REQUEST

Bosses with hole and keyway in compliance with DIN 6885/1 tolerance P9 (see page -).

To order the handwheel with keyway add the index -K after the code and the description (i.e. 207731-K- ETK.400+I A-20-K-).

For sufficient quantities: executions with locking device (Elesa patent), (see page -).

The three-arm handwheels can be customised with marks, logo or special graphics (tampoprinting). The handwheels or handles can be supplied also in special coloured technopolymer.

#### ERGONOMY AND DESIGN

The three equidistant arms (120°) offer a perfect grip and the greatest operational easiness, also to disabled people. The rounded lines, the special compact and ergonomic shape of ETK. handwheel design together with the absence of cavities offer an excellent level of safety for hands during the steering operations.

#### ACCESSORIES ON REQUEST

- GN 184: axial retaining washer in black-oxide steel (see page -).  
 - ECB.I: polyester based technopolymer (PBT) boss cap, in Elecolors colours, glossy finish, press-fit assembly (see table).




C1 RAL7021	C2 RAL2004	C3 RAL7035	C4 RAL1021	C5 RAL5024	C6 RAL3000
---------------	---------------	---------------	---------------	---------------	---------------

#### ECB.I

Code	Description	Boss cap for
29451-*	ECB.I3-*	ETK.400

\* Complete with colour index (C1, ..., C6).

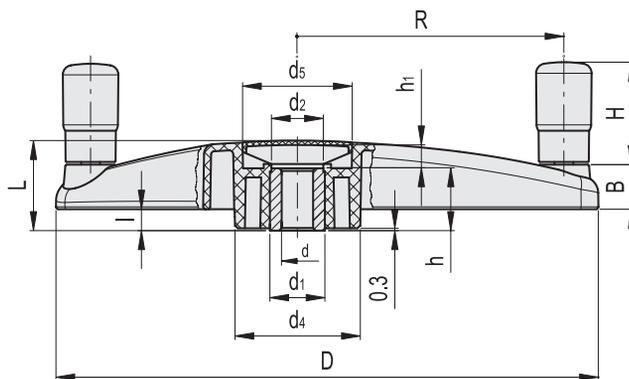

\* Complete with colour index, example: 207731-C2 ETK.400+I A-20-C2

C1 RAL7021	C2 RAL2004	C3 RAL7035	C4 RAL1021	C5 RAL5024	C6 RAL3000
---------------	---------------	---------------	---------------	---------------	---------------

Code	Description	D	dH7	L	B	d1	d2	d4	d5	h	h1	I	H	R	C# [Nm]	L# [J]	
207731-*	ETK.400+I.631 A-20-*	400	20	54	28	35	33	80	70	38	14	12	65	178	320	18	980

# For maximum applicable torque (C) and impact strength (L) see Technical data (on page ).